

Suitable for providing a bright and powerful light beam to a specific area or in a specific angle

For universal use on workstations, workshops, laboratories, etc.

With shockproof acrylic profile and end-covers in black anodized aluminium

Light is concentrated in a 75° beam angle: it provides almost double illumination compared to traditional 36W fluorescent tubes

The technical lifetime of LEDs is approx. 100000 hours

Blinding during work is avoided, and the lamp can be turned to provide the optimum lighting angle

Modular system to reach an overall length of max 8 m

Lamp diameter 25 mm

Power supply 230V



For use on equipped vans and bridge cranes

Mod. LINE LIGHT 75

Unit overall length 838 mm

With 96 PLCC2 LED

600 lumen - 1300 lux at 0,5 m

Consumption 9W

Protection level IP 67 (against dust infiltration and effects of temporary immersion)

Supplied with 20 W transformer,

8 m power supply cable and 2 clips for wall mounting

Code N 9095 0000	N 9095/0	Each €	1
------------------	----------	--------	---



838 mm

With 2 clips for wall mounting

IP 67

Mod. LINE LIGHT 120

Unit overall length 1234 mm

With 156 PLCC2 LED

1000 lumen - 1600 lux at 0,5 m


Consumption 15W

Protection level IP 67 (against dust infiltration and effects of temporary immersion)

Supplied with 20 W transformer,

8 m power supply cable and 2 clips for wall mounting

Code N 9095 2000	N 9095/2	Each €	1
------------------	----------	--------	---

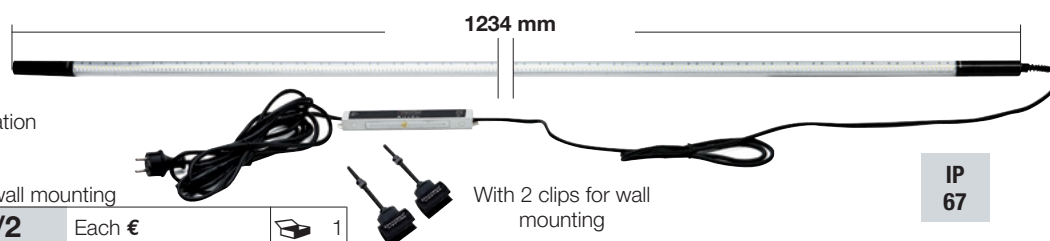

1234 mm

With 2 clips for wall mounting

IP 67

Magnet - Ø 66 mm

Suitable for lamps N 9095/0 and N 9095/2

To be used with clip holders supplied with LINE LIGHT system

Code N 9095 6000	N 9095/6	Each €	1
------------------	----------	--------	---



Mod. LINE LIGHT Bonnet Light C+R

It can be used with or without power supply cable

Unit overall length 1017 mm

Supplied with adjustable telescopic support from 1,2 to 1,7 m with

hooks for hanging to car bonnet without damaging the paint

48 SMD LED with 2 levels of intensity: 1) 500 lumen - 1000 lux at 0,5 m
2) 1000 lumen - 2000 lux at 0,5 m

Operating time approx. 3h / 1,5h (step 1 / 2)

Rechargeable Li-ion battery 3,7 V

(5200 mAh)


Charging time approx. 4h

Supplied with 24W transformer and

5 m power supply cable

Dimensions Ø 25x1017 mm

Weight 1 kg



Rechargeable battery



DUAL 2 in 1 SYSTEM

IP 65

Code N 9096 3000	N 9096/3	Each €	1
------------------	----------	--------	---



1025 mm

Accessories for LINE LIGHT lamps

Flexible arm with suction cup and clip

Length 200 mm

Code N 9097 6700	N 9097/67	Each €	1
------------------	-----------	--------	---

Flexible arm with magnet and clip


Length 200 mm

Code N 9097 6800	N 9097/68	Each €	1
------------------	-----------	--------	---

Turnable hook for lamp suspension

With accessories for stationary positioning

Code N 9097 6900	N 9097/69	Each €	1
------------------	-----------	--------	---

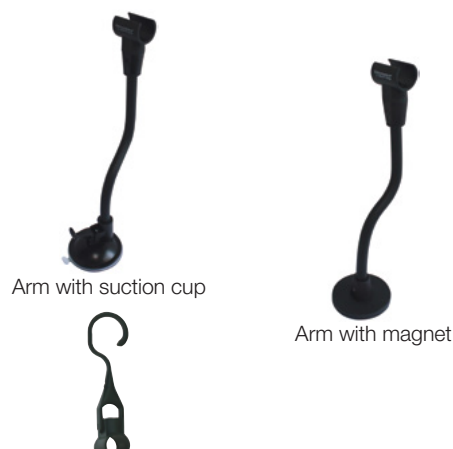

Arm with suction cup

Arm with magnet