

Screwdrivers for slotted screws

felo

Series 400 **ERGONIC**

With ergonomic handle which adapts perfectly to the user's hand, developed and patented for precise comfortable use with minimum effort of the hand while turning, **two-component** with exceptional level of comfort, ergonomics, precision and transmission of force, its excellent adaptability is due to the following features:

- (A) - highly flexible synthetic cells located under the coating of the handle
- (B) - soft elastomer completely covering the handle and high resistance to scratching and acids besides being pleasant to the touch

With crosswise hole

A 1437/7 - With round section blade

Blade length mm	Code	A 1437/7 Each €	Blade dimension mm	Overall length mm	pcs.
75	A 1437 7075		2,5x0,4	160	12
80	A 1437 7080		3,0x0,5	165	12
100	A 1437 7100		3,5x0,6	185	12
100	A 1437 7101		4,0x0,8	195	12
125	A 1437 7125		5,5x1,0	225	12
150	A 1437 7150		6,5x1,2	255	12
175	A 1437 7175		8,0x1,2	290	12
200	A 1437 7200		10,0x1,6	310	6

A 1442/7 - With hex bolster and hexagonal blade

Blade length mm	Code	A 1442/7 Each €	Blade mm	Blade dim. mm	Overall length mm	mm	pcs.
75	A 1442 7075		4	4,0x0,8	170	—	12
101	A 1442 7101		5	5,5x1,0	200	8	12
125	A 1442 7125		6,35	6,5x1,2	230	10	12
150	A 1442 7150		8	8,0x1,2	260	13	12
175	A 1442 7175		8	10,0x1,6	285	13	6
200	A 1442 7200		10	12,0x2,0	310	16	6

Series 500 **frico**

Chrome-molybdenum-vanadium steel go-through hexagonal section blade, matt chromed version with burnished tip

Two-component ergonomic handle: shock-proof synthetic resin internal part, soft non-slip elastomer exterior for a better more comfortable grip

With crosswise hole - Blade dimension conforming to DIN ISO 2380

Blade length mm	Code	A 1442/2 Each €	Blade mm	Blade dim. mm	Overall length mm	mm	pcs.
100	A 1442 2100		5	5,5x1,0	200	8	12
125	A 1442 2125		6,35	6,5x1,2	225	10	12
155	A 1442 2155		8	8,0x1,2	260	13	6
175	A 1442 2175		8	10,0x1,6	280	13	6
200	A 1442 2200		10	12,0x2,0	305	16	6

Model «**HEXAnamic**»


Blade in high-quality special steel, matt chromed, grey tip for high protection against corrosion and perfect hold in the screw head

Three-component ergonomic handle with recessed hexagon that allows to find the ideal position for the hand to apply higher torque


- ① - blue synthetic resin for optimal blade-handle fixation
- ② - soft, black synthetic resin, non-slip for comfortable, safe gripping
- ③ - hard, light blue synthetic resin shock-resistant

The ergonomic handle is resistant against corrosive liquids, suitable for use even with oily hands and allows to apply higher torque
ISO 2380-1 and -2

Blade length mm	Code	A 1444/2 Each €	Blade dim. mm	Overall length mm	mm	pcs.
80	A 1444 2080		3,5x0,6	180	—	5
100	A 1444 2101		4,0x0,8	200	—	5
125	A 1444 2125		5,5x1,0	240	8	5
150	A 1444 2149		6,5x1,2	265	10	5
150	A 1444 2150		8,0x1,2	280	13	5
175	A 1444 2175		10,0x1,6	305	13	5
200	A 1444 2200		12,0x2,0	330	16	5

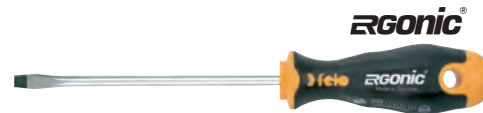

Hexagon collar

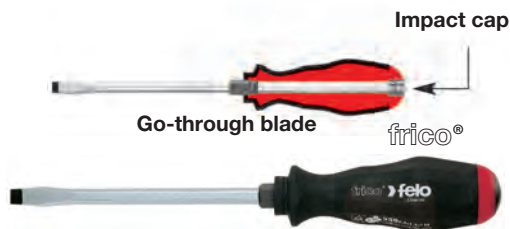

Go-through blade

Impact cap

frico®

