

KNIPEX Circlip pliers for internal circlips

In forged chrome-vanadium, oil-hardened steel
With thermoplastic coated handles - Strong shape, forged

For holes (internal rings)

With straight jaws (DIN 5256 C) - Without spring

Standard version - Polished head - 1

Size	Code	B 1750/2 Each €	For rings Ø mm	Overall length mm	pcs.
0	B 1750 2000		8÷13	140	6
1	B 1750 2001		12÷25	140	6
2	B 1750 2002		19÷60	180	6
3	B 1750 2003		40÷100	225	6
4	B 1750 2004		85÷140	320	6
5*	B 1750 2005		122÷300	570	1
6*	B 1750 2006		252÷400	580	1

Spare tips for B 1750/2 sz. 5 - 6

Suitable for size	5	6
Code	B 1750 3005	B 1750 3006
B 1750/3 Per pair €		

Precision execution with reduced and phosphated head, resistant to rust, suitable for rings placed in spaces difficult to access

Inserted and inclined points, made of spring steel, particularly resistant to breakage and wear

With **internal spring**, protected by the screw, it does not get dirty and is not lost

High **precision screw** joint for always optimal movement

B 1750/5 - With adjustable stop to limit the opening of the head

Size	Code	B 1750/4 Each €	Code	B 1750/5 Each €	For rings Ø mm	Overall length mm	pcs.
0	B 1750 4000		B 1750 5000		8÷13	140	6
1	B 1750 4001		B 1750 5001		12÷25	140	6
2	B 1750 4002		B 1750 5002		19÷60	180	6
3	B 1750 4003		B 1750 5003		40÷100	225	6
4	B 1750 4004		—		85÷140	310	6

With jaws bent at 45° - Without spring

Standard version - Polished head - 1

Size	Code	B 1751/1 Each €	For rings Ø mm	Overall length mm	pcs.
0	B 1751 1000		8÷13	140	6
1	B 1751 1001		12÷25	140	6
2	B 1751 1002		19÷60	180	6
3	B 1751 1003		40÷100	225	6
4	B 1751 1004		85÷140	310	6

With jaws bent at 90° (DIN 5256 D) - Without spring

Standard version - Polished head - 1

Size	Code	B 1751/2 Each €	For rings Ø mm	Overall length mm	pcs.
0	B 1751 2000		8÷13	130	6
1	B 1751 2001		12÷25	130	6
2	B 1751 2002		19÷60	170	6
3	B 1751 2003		40÷100	215	6
4	B 1751 2004		85÷140	300	6
5*	B 1751 2005		122÷300	590	1
6*	B 1751 2006		252÷400	600	1

Spare tips for B 1751/2 gr. 5 - 6

Suitable for size	5	6
Code	B 1751 3005	B 1751 3006
B 1751/3 Per pair €		



Precision execution - Reduced and phosphated head

B 1751/5 - With adjustable stop to limit the opening of the head


Size	Code	B 1751/4 Each €	Code	B 1751/5 Each €	For rings Ø mm	Overall length mm	pcs.
0	B 1751 4000		B 1751 5000		8÷13	130	6
1	B 1751 4001		B 1751 5001		12÷25	130	6
2	B 1751 4002		B 1751 5002		19÷60	165	6
3	B 1751 4003		B 1751 5003		40÷100	210	6
4	B 1751 4004		—		85÷140	305	6

Tweezers, electronics pliers, combination and grip pliers


For bores (internal rings)

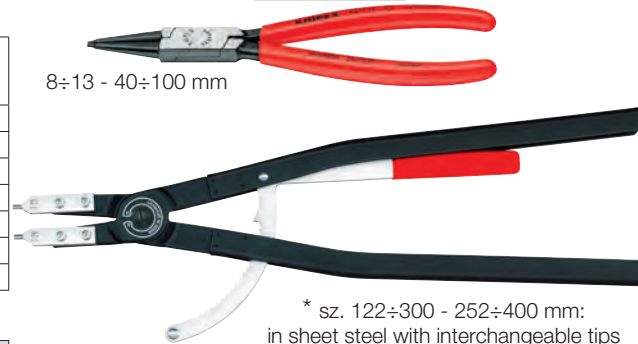

Large contact surface: it makes it difficult for the ring to come out and provides a more secure grip

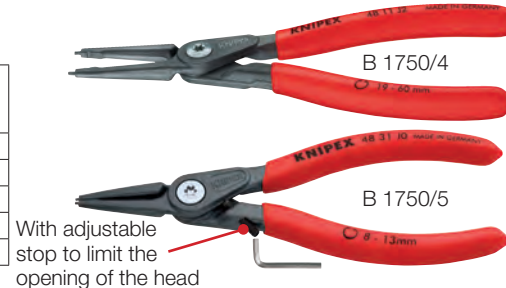

With adjustable stop to limit the opening of the head

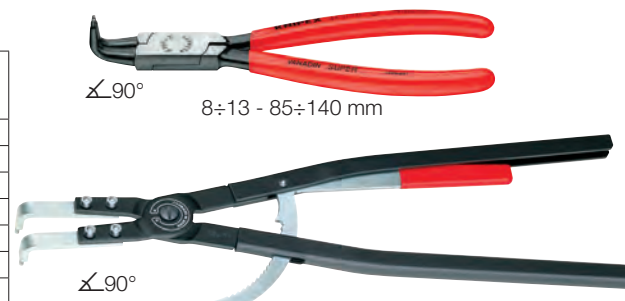

With adjustable stop to limit the opening of the head

B 0