


**Round nylon type**

Flexible, crushproof and resistant to peak loads - It protects hands from accidental cuts  
 It recalls the original shape, without risk of tangles  
 Special brass alloy endings, **with curve-detection spring** in brass-plated, spiraled steel  
 Breaking load 35/40 kg/mm<sup>2</sup>

**B 2185/3 - Diameter 3 mm**

**B 2185/34 - Diameter 4 mm**

Overall length	m	5	10	15	20	30
<b>Code</b>		<b>B 2185 3005</b>	<b>B 2185 3010</b>	<b>B 2185 3015</b>	<b>B 2185 3020</b>	<b>B 2185 3030</b>
<b>B 2185/3</b>	Each €					
<b>Code</b>		<b>B 2185 3405</b>	<b>B 2185 3410</b>	<b>B 2185 3415</b>	<b>B 2185 3420</b>	<b>B 2185 3430</b>
<b>B 2185/34</b>	Each €					

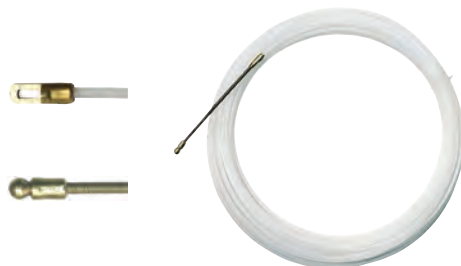

**Fiberglass covered with Moplen self-lubricant**

Flexible, crushproof and resistant to peak loads - It protects hands from accidental cuts  
 It replaces the nylon type in long lengths or in large diameter tubing  
 Special brass alloy endings, **with curve-detection spring** in brass-plated, spiraled steel  
 Breaking load 50 kg/mm<sup>2</sup>

**Diameter 4 mm**

Overall length	m	20	30	50
<b>Code</b>		<b>B 2185 4020</b>	<b>B 2185 4030</b>	<b>B 2185 4050</b>
<b>B 2185/4</b>	Each €			




**Spiraled type - Ø 4,5 mm**

Flexible, crushproof and resistant to peak loads - It protects hands from accidental cuts  
**In steel wire coated with special resins.** With triple spiral, that make it light, strong, rigid, as well as flexible

Suitable for bearing higher breaking loads, up to approx. 230 kg/mm<sup>2</sup>

The nylon coating allows for a lower friction, to facilitate the access also in multiple wire pipes  
 Special brass alloy endings, **with curve-detection spring** in brass-plated, spiraled steel  
 With M5 fittings

Overall length	m	10	15	20	30
<b>Code</b>		<b>B 2185 4510</b>	<b>B 2185 4515</b>	<b>B 2185 4520</b>	<b>B 2185 4530</b>
<b>B 2185/45</b>	Each €				

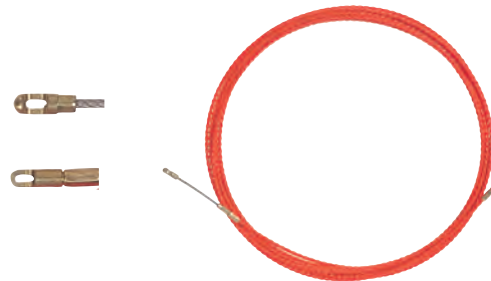

**ACCESSORIES FOR FISH TAPES**

**Vertical winding reel**

Entirely in galvanized steel - With lateral brake  
 Suitable for carrying, unrolling and rolling up fish tapes for electricians

**B 2185/5 - For fish tapes B 2185/4 with length 20÷50 m**

Outer wheel 350 mm - Height 460 mm - Weight (empty) 2,1 kg

**B 2185/6 - For fish tapes B 2185/45 with length 10÷30 m**

Outer diameter wheel 295 mm - Height 410 mm - Weight (empty) 2 kg

<b>Code B 2185 5000</b>	<b>B 2185/5</b>	Each €		1
<b>Code B 2185 6000</b>	<b>B 2185/6</b>	Each €		1



**Rubber wire puller**

Suitable for increasing the traction during wire pulling operations

**For fish tapes Ø 3÷6 mm**

<b>Code B 2185 7000</b>	<b>B 2185/7</b>	Each €		1
-------------------------	-----------------	--------	--	---



**“LUBRICABLE” - LUBRICANT FOR ELECTRICAL CABLES**

Features:

- highly-productive, reduces friction and facilitates extraction of old cables
- excellent lubricant, allows more fluid penetration and easier sliding of cables in pipes, wireways and containing sheaths in uneven paths and with many curves
- anti-ageing, doesn't get yellow

**K 3844/1 - Spray can** - silicone-based - Content 400 ml

**K 3844/2 - Liquid** in plastic bottle with measuring cap - Content 1000 ml

<b>Code K 3844 1000</b>	<b>K 3844/1</b>	Each €		6
<b>Code K 3844 2000</b>	<b>K 3844/2</b>	Each €		6



K 3844/1



K 3844/2