

## Lead pipe expanding plier

In special steel

Knurled jaws - Parallel span width - With spring

For pipes up to Ø inch 1 1/2

Overall length 240 mm

Code B 2292 0000	<b>B 2292</b>	Each €		1
------------------	---------------	--------	---	---



## Bicycle and motorcycle pliers



In special forged, oil tempered steel - Thin, polished head


Thermoplastic coated handles

With double socket Ø 6 and 10 mm - Overall length 200 mm

**B 2300 - Straight** version

**B 2301 - Bent** version

Code B 2300 0000	<b>B 2300</b>	Each €		6
Code B 2301 0000	<b>B 2301</b>	Each €		6

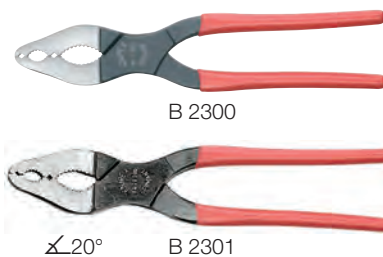

## Multiple slip joint spanner "TUCANO"

In forged, oil hardened chrome-vanadium steel - DIN ISO 5743

Thermoplastic coated handles - Polished head

With double guide continuous hinge and spacer stop on the handles

**Automatic opening adjustment** on the piece itself, pushbutton operated

**Play-free grip to avoid slipping or rounding of the nuts and loosening rusted or painted connections**

Allows fast single-hand operation


Pliers opening of the jaws for fast adaptation to the nut to be tightened or loosened, based on the ratchet principle

For nuts of 10÷32 mm (3/8"÷1 1/4") replaces a wrench set

With 15 adjustment positions - Self-locking range 17÷32 mm

Overall length 250 mm

Code B 2312 0000	<b>B 2312</b>	Each €		1
------------------	---------------	--------	---	---

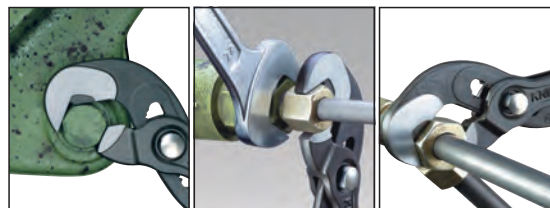

Suitable for operation on rounded nuts

As the second spanner for tightening locknuts

Self-locking: no slip on workpieces; less effort required



## Water pump pliers


In chrome-vanadium steel

Guard on the handles prevents operators' fingers being pinched

 - DIN ISO 8976

Combined, toothed concave and straight knurled jaws - Approx. hardness tempered teeth 56 HRC

With hinge opening - Milled guiding grooves

Thermoplastic coated handles - Polished head 1 -  pc. 6

Overall length	mm	125	250
Code		<b>B 2313 1125</b>	<b>B 2313 1250</b>
<b>B 2313/1</b>	Each €		
For pipes Ø max.	mm	1 1/16" (17 mm)	1 5/16" (34 mm)
For nuts max.	mm	14	36
Adjustments	n°	4	5



125 mm



250 mm

 - DIN ISO 8976

With open hinge

Thermoplastic coated handles - Milled guiding groove

Matt chromed version - With 6 adjustment positions -  pcs. 1

Overall length	mm	260	300
Code		<b>B 2313 3255</b>	<b>B 2313 3300</b>
<b>B 2313/3</b>	Each €		
For pipes Ø max.		2 9/16" (65 mm)	3 5/32" (80 mm)



Type with lever-operated automatic opening adjustment

With through-hinge

Self-locking, no slippage on the workpiece and minimum force required

Combined jaws, concave toothed and straight knurled - Hardness approx. 61 Hrc

Teeth opposite to the rotation direction, hardened and resistant to wear, which allow a safe grip

Handles coated with thermoplastic resin

With 13 settings - For pipes Ø max. 2" - For nuts max 50 mm

Overall length 260 mm

Code B 2313 4260	<b>B 2313/4</b>	Each €		1
------------------	-----------------	--------	---	---

