


## REED Rotary hinge cutters for steel pipes

### In steel cast iron

With specific wheels, also suitable for cast iron, soft iron and several type of stainless steel  
 Hinge opening to facilitate the insertion of the pipe  
 Used with an oscillating 90°÷110° motion  
 Easy to use, even in hard to reach places and on



REED EXCLUSIVE SIZE

### installed pipes

Needs just 10 cm of space  
 With **closed 360° arch** for the transmission of high leverage and with sliding guide for clean and precise cuts  
 With 4 interchangeable wheels

For pipes up to Ø inches	2 1/2	4	6	8	12
<b>Code</b>	<b>B 2407 1212</b>	<b>B 2407 1004</b>	<b>B 2407 1006</b>	<b>B 2407 1008</b>	<b>B 2407 1012</b>
<b>B 2407/1</b> Each €					
For pipes Ø max. inches	1	2	4	6	8
For pipes Ø mm	32÷76	60÷125	114÷182	168÷240	219÷356
Overall length mm	419	559	711	813	864
Model	H2 1/2 S	H4S	H6S	H8S	H12S
Weight kg	3,6	6,3	10	13	18

### Spare wheels

#### For steel

For pipes up to Ø inches	2 1/2	4	6	8*
<b>Code</b>	<b>B 2407 2212</b>	<b>B 2407 2004</b>	<b>B 2407 2006</b>	<b>B 2407 2008</b>
<b>B 2407/2</b> Each €				
Ø ext. x thickness x hole mm	31,5x19x8,7	41,3x19x8,7	41,5x19x8,9	49x19x9,5
Model	HS2 1/2	HS4	HS6	HS8

\* Also suitable for 12" pipe cutter

#### For nodular cast iron

For pipes up to Ø inches	2 1/2	4	6*
<b>Code</b>	<b>B 2407 3212</b>	<b>B 2407 3004</b>	<b>B 2407 3006</b>
<b>B 2407/3</b> Each €			
Ø ext. x thickness x hole mm	25,8x19x9,5	35,8x19x8,7	49x19x9,5
Model	2RBCI	HI4	HI6

\* Also suitable for 8" and 12" pipe cutter

#### For VERY thick steel pipes



For pipes up to Ø inches	2 1/2	4	6	8*
<b>Code</b>	<b>B 2407 4212</b>	<b>B 2407 4004</b>	<b>B 2407 4006</b>	<b>B 2407 4008</b>
<b>B 2407/4</b> Each €				
Ø ext. x thickness x hole mm	35x19x8,7	41,6x19x8,7	46x19x9,5	48,7x19x9,5
Model	HX2 1/2	HX4	HX6	HX8

\* Also suitable for 12" pipe cutter

## REED Rotary cutters for steel pipe

Suitable for cutting **large diameter steel and stainless steel pipes in excavations etc.**

With specific wheels, also suitable for cast iron and soft iron  
 With long lever for the application of high leverage  
 Usable in hard to reach places  
 Used with an oscillating 45°÷60° motion  
 They do not cause sparks and therefore they can be used in places with fire risk as well as under water  
 With 4 interchangeable wheels for steel

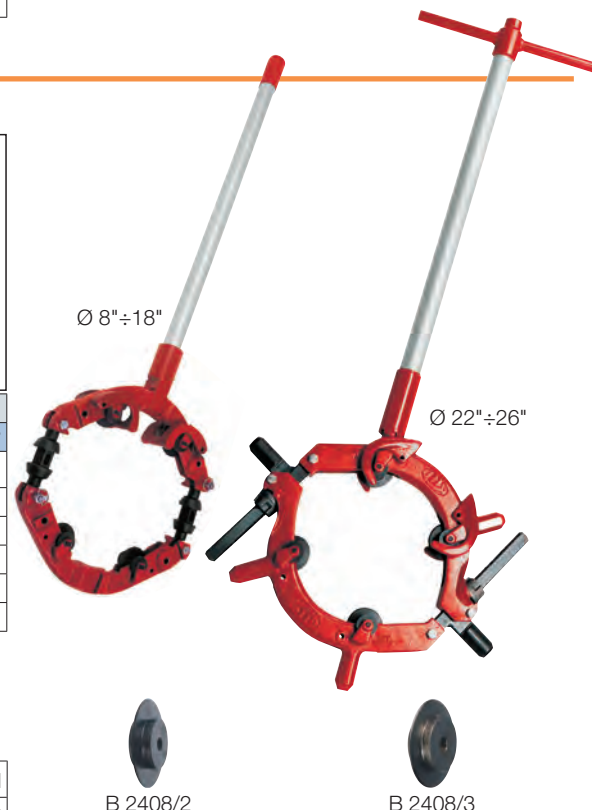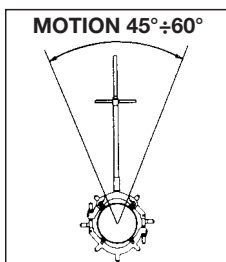

For pipes up to Ø inches*	8	14	18	22	26
<b>Code</b>	<b>B 2408 1008</b>	<b>B 2408 1014</b>	<b>B 2408 1018</b>	<b>B 2408 1022</b>	<b>B 2408 1026</b>
<b>B 2408/1</b> Each €					
For pipes Ø max. inches	6	10	16	20	24
For pipes Ø mm	159÷246	266÷358	368÷462	476÷572	584÷660
Overall length mm	1880	1981	2134	2667	2794
Weight kg	24	29	35	44	52
Model	LCRC8S	LCRC12S	LCRC16S	RC20S	RC24S

\* Steel pipes - For cast iron pipes calculate about 2" less (except for 8" pipe)

**Spare wheels** for pipe cutter B 2408/1 - Dimensions 73,1x19x9,5 mm

**B 2408/2 - For steel and stainless steel pipes - INOX**

**B 2408/3 - For nodular cast iron**

<b>Code B 2408 2000</b>	<b>B 2408/2</b>	Each €	1
<b>Code B 2408 3000</b>	<b>B 2408/3</b>	Each €	1