

Hacksaw frames

Complete with bi-metal blade, 24 teeth per inch, length 12" (300 mm)

Fixed, with straight grip

For 12 inch (300 mm) blades - Oven-dried painting



Reinforced version - Blade tensioning handle

In flat rolled steel 18x8 mm

Square 14 mm drives - Cross cut - Overall length 520 mm

Code D 2750 1000	D 2750/1	Each €	6
------------------	----------	--------	---



Normal version - Wing nut blade tensioner

In flat rolled steel 20x6 mm

Square 14 mm drives - Cross cut - Overall length 520 mm

Code D 2750 2000	D 2750/2	Each €	6
------------------	----------	--------	---



Lightweight version - Wing nut blade tensioner

In flat rolled steel 18x6 mm

Removable square 8 mm drives - Single-sided blade - Overall length 510 mm

Code D 2750 3000	D 2750/3	Each €	6
------------------	----------	--------	---



Adjustable, with closed grip

For 8 and 12 inch (200 and 300 mm) blades - Oven-dried painting



Handle in aluminium with non-slip rubber coating

In flat steel tube 18x10x1,5 mm - Wing nut blade tensioner

Removable square 8 mm drives - Cross cut - Overall length 450 mm

Code D 2763 0000	D 2763	Each €	24
------------------	--------	--------	----



Fixed, in rectangular steel tube with closed grip

For 12 inch (300 mm) blades

Handle with special mechanism for strong and proper blade tensioning with up to twice the force of the best frames

Also prevents dangerous bending of blades and allows for quick and accurate cutting

Two mounting positions for the blade for 45° and 90° cutting - With blade magazine




Version in rectangular painted aluminium tube 10x20 mm

Aluminium handle

Eight turns of the handle end will allow to achieve proper tension on the blade

Overall length 430 mm

Code D 2763 1000	D 2763/1	Each €	1
------------------	----------	--------	---

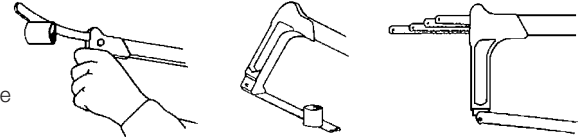

Version in rectangular chromed steel tube 12,5x25 mm

Handle in light alloy

Key-hole saw blades can be fitted frontally

Seven turns of the blade tensioner will allow to achieve proper tension on the blade

Overall length 400 mm

D 2763/2 - With bi-metal blade D 2728/5

D 2763/4 - With bi-metal blade **LENOX** D 2728/6

Code D 2763 2000	D 2763/2	Each €	1
------------------	----------	--------	---

Code D 2763 4000	D 2763/4	Each €	6
------------------	----------	--------	---



D 2763/2

LENOX

High tension (3500 kg/cm²) for improved performance

In rectangular chromed steel tube 12,5x25 mm

Ergonomic handle covered in soft rubber, with convenient blade storage

Key-hole saw blades can be fitted frontally

Max 12 turns of the blade tensioner will allow to achieve proper tension on the blade

Complete with bi-metal blade D 2728/6, 24 teeth per inch - Overall length 410 mm

Code D 2764 0000	D 2764	Each €	1
------------------	--------	--------	---



High tension
3500 kg/cm²

