

ABC TOOLS Electric bench grinders with column

Engine with protection level IP 52 (against dust deposits and drops of water)
Switch with minimum voltage coil and engine thermal protection


Grinding wheel max 2800 rpm

Consisting of:

- 1 **grinder** with technical specifications as shown below,
- 1 **column** E 1064/9 with sheet metal surface and cooling water tub,
- 1 **vacuum cleaner hose** in flexible aluminium
- 1 **canvas bag** to collect dust, protection covers and supporting structure


Type with grinder E 1061

For three-phase current 380/400 V - 50 Hz - Without grinding wheels

Grinding wheel Ø x thickness mm	200x25
Wheel holder shaft Ø mm	20
Engine power W	747,5
Dimensions LxDxh mm	800x710x1300
Approx. overall weight kg	64
Code E 1065 5000	E 1065/5 Each €  1

Type with cleaner/grinder E 1063

For three-phase current 380/400 V - 50 Hz - Without grinding wheel and without felt pad

Grinding wheel Ø x thickness mm	200x25
Max. brush dimen. mm	200x30
Wheel holder shaft Ø mm	20
Engine power W	747,5
Overall dim. mid-engine/flange mm	300
Dimensions LxDxh mm	800x710x1300
Approx. overall weight kg	64
Code E 1065 7000	E 1065/7 Each €  1



IP 52

Deburring wheel brushes

Suitable for deburring, glazing, roughening, descaling, removing mold, enamels, etc.
High density brushes with short "T" trim length for more aggressive action and maximum cut
For individual use, with a set of adapters to fit various holes


osborn - With high-resistance crimped steel wire Ø 0,30 mm

D 4054/5 - Large face width

D 4054/7 - Extra large face width


Diameter D mm	75	100	125	150	178	200
Code D 4054	5075	5100	5125	5150	5178	5200
D 4054/5 Each €						
Code D 4054	—	—	7125	7150	7178	7200
D 4054/7 Each €						
Width A approx. mm D 4054/5	19	22	28	25	26	28
Width A approx. mm D 4054/7	—	—	30	38	38	38
Wire free length T mm	16	23	30	30	38	38
Hole B mm	20	20	20	32	32	32
Reducers for hole Ø size	1/2" - 5/8"		13 - 15 - 16 - 19 - 20 - 7/8" - 1"			
Max speed rpm	10000	8000	6000		4500	

D 3 → pag. 382

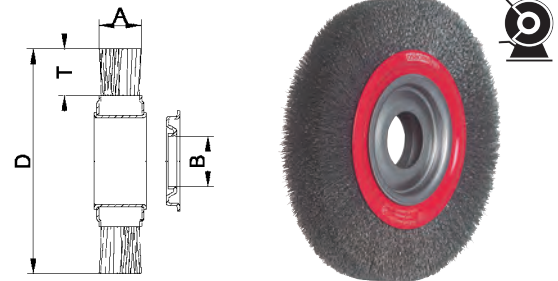

ABC TOOLS Ceramic bonded grinding wheels

Normal grey corundum - For ferrous metals and simple steel

Diameter x thickness mm	150x20	150x25	200x20	200x25
Code	D 9770 2405	—	D 9770 2408	D 9770 2409
D 9770/24 - Grit 24P Each €				
Code	D 9770 3605	D 9770 3606	D 9770 3608	D 9770 3609
D 9770/36 - Grit 36P Each €				
Code	D 9770 4605	D 9770 4606	D 9770 4608	D 9770 4609
D 9770/46 - Grit 46M Each €				
Code	D 9770 6005	D 9770 6006	D 9770 6008	D 9770 6009
D 9770/60 - Grit 60P Each €				
Hole Ø mm	16	16	20	20
Max rotational speed rpm	4500	4500	3350	3350
 pcs.	5	4	6	5

D 7 → pag. 420

Polishing cotton buffs → D 5 pag. 417

Safety goggles → M 2 pag. 803

