


Adjustable wrenches

In alloy steel, chrome-plated

Head bent at 15°


Overall length	mm	150	200	250	310	380	460
Code	A 2878	1150	1200	1250	1310	1380	1460
A 2878/1	Each €						
Overall length	inches	6	8	10	12	15	18
Opening	mm	20	25	30	34	48	55
	pcs.	6	6	6	6	1	1



ABC TOOLS

In chrome-vanadium steel, chrome-plated

Head offset at 15° with millimeter scale


Overall length	mm	100	150	200	250	300	375	450
Code	A 2879	0100	0150	0200	0250	0300	0375	0450
A 2879	Each €							
Overall length	inches	4	6	8	10	12	15	18
Opening	mm	13	24	29	33	39	45	55
	pcs.	4	10	6	6	6	1	1



HAZET

In chrome-vanadium steel, phosphate coating

Polished head, offset 15° with millimeter scale - ISO 6787

Overall length	mm	100	150	200	250	300	380	460
Code	A 2880	0100	0150	0200	0250	0300	0380	0460
A 2880	Each €							
Overall length	inches	4	6	8	10	12	15	18
Opening	mm	15	20	25	30	34	44	54
	pcs.	5	5	5	5	1	1	1



KNIPEX Pliers wrench

In forged, oil hardened chrome-vanadium steel

Nickel-plated head - DIN ISO 5743

Particularly suited for continuous tightening and loosening, holding, crushing and bending items, can be used also on sanitary ware with delicate surfaces

With continuous hinge pin and **push-button opening adjustment right on the workpiece**

Smooth, quick opening, parallel plier jaws, which allows quick adaptation to the nut using the ratchet principle


With transmitted force multiplied 10 times: strong gripping power

A 2882 - Handles coated in thermoplastic resin

A 2882/3 - Handles in very thick two-component material with hand guard

A 2882/4 - With safety ring welded to the grip for use with safety lanyard for connection to fall-arresting protections - **Breaking load 400 N**

A 2882/7 - Version with handles folded 15°, suitable for greater freedom of action and reduce the risk of injury to hands

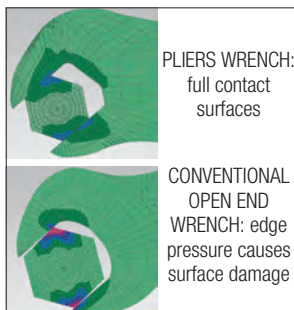

PLIERS WRENCH:
full contact
surfaces


CONVENTIONAL
OPEN END
WRENCH: edge
pressure causes
surface damage

Overall length	mm	125	150	180	250	300	400
Code	A 2882	0125	0150	0180	0250	0300	0400
A 2882	Each €						
Code	A 2882	—	3150	3180	3250	—	—
A 2882/3	Each €						
Code	A 2882	—	—	4180	4250	—	—
A 2882/4	Each €						
Code	A 2882	—	—	—	7250	—	—
A 2882/7	Each €						
Opening	mm	0÷23	0÷27	0÷35	0÷46	0÷60	0÷85
Opening	inches	7/8	1	1 3/8	1	2 3/8	3 3/8
Adjustment options	n°	11	14	13	17	22	25
Weight	kg	0,1	0,2	0,3	0,6	0,8	1,4

Version with immersion insulated handles and hand guards

With 17 possible opening settings

Total length **250 mm** - Opening 0÷46 mm (1 3/4")

Code M 7109 0250	M 7109	Each €		1
------------------	---------------	--------	---	---

M 6 → pag. 823



A 2882 mm 250



A 2882/3 mm 250


With safety tab welded to the grip
for use with safety lanyard for connection
to fall-arresting protections



A 2882/4 mm 250



A 2882/7 mm 250

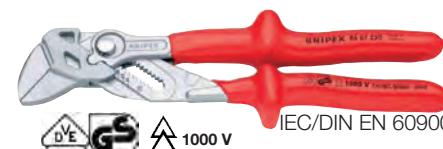

1000 V

IEC/DIN EN 60900