

Electrode holder

Manufactured in accordance with standards IEC 974-11 - EN 60974-11
Body and lever in die cast brass with insulating coating in thermosetting plastic material
Insulated compression spring



Straight type with electrode holder jaws

Spring lock - Electrode fastening in 9 positions (7 for gr. 300)

Capacity at 60% Ampere	150	200	250	300
Code	K 3767 1150	K 3767 1200	K 3767 1250	K 3767 1300*
K 3767/1 Each €				
Capacity at 35% Ampere	200	250	300	400
For electrodes Ø mm	2÷3,2	2,5÷4	3,2÷5	4÷6,3
For cable sections mm ²	16÷25	25÷35	35÷60	50÷70

* Electrode adjustment in 7 positions



Ben type with electrode holder hole

Sleeve lock - Electrode fastening in 1 position

Capacity at 60% Ampere	200	300
Code	K 3767 3200	K 3767 3300
K 3767/3 Each €		
Capacity at 35% Ampere	250	400
For electrodes Ø mm	2,5÷4	4÷6,3
For cable sections mm ²	25÷35	50÷70



Straight type with electrode holder hole

Spring lock - Electrode fastening in 5 positions

Capacity at 60% Ampere	150	200	250	300
Code	K 3767 5150	K 3767 5200	K 3767 5250	K 3767 5300
K 3767/5 Each €				
Capacity at 35% Ampere	200	250	300	400
For electrodes Ø mm	2÷3,2	2,5÷4	3,2÷5	4÷6,3
For cable sections mm ²	16÷25	25÷35	35÷50	50÷70



Ground clamps

Type with spring lock - The current passes through pure copper conductors

Brass version

For cable sections up to 35 mm²

Capacity at 60% Ampere	150	200	400
Code	K 3767 8150	K 3767 8200	K 3767 8400
K 3767/8 Each €			
Capacity at 35% Ampere	200	250	500
Maximum opening mm	45	55	65



Steel version, stainless


Swivel brass contact

Capacity at 60% Ampere	200	300	400	500
Code	K 3768 0200	K 3768 0300	K 3768 0400	K 3768 0500
K 3768 Each €				
Capacity at 35% Ampere	250	400	500	600
For cable sections mm ²	25÷35	50÷70	70÷95	95÷120
Maximum opening mm	53	74	80	80



Arc type with screw lock - In brass

Capacity at 60% Ampere	300	500	700
Code	K 3768 2300	K 3768 2500	K 3768 2700
K 3768/2 Each €			
Capacity at 35% Ampere	400	600	800
For cable sections mm ²	35÷50	70÷95	95÷120
Maximum opening mm	38	70	100

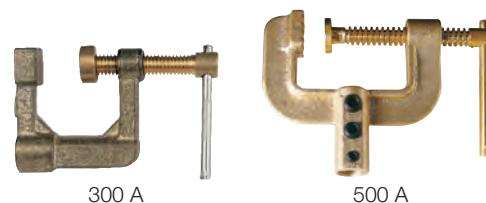

Type with screw lock and swivel contact - For high amperes

Capacity: at 60% up to 500 Ampere - at 35% up to 600 Ampere

For cable sections 70÷95 mm² - Max jaw width 50 mm

Code K 3768 4000	K 3768/4	Each €	1
-------------------------	-----------------	--------	---

