

**Type with piston advancement**

**Metal body**, complete with concave ferrule and telescoping tube  
Interchangeable M 10x1 threaded ferrules

Body	Ø mm	30	45
Code		<i>K 3890 0030</i>	<i>K 3890 0045</i>
<b>K 3890</b>	Each €		
Content	g	50	110

**Type with screw advancement**

For greater pushing power in cold weather  
With flexible hose and brass head K 3900/1  
Body Ø 40 mm - Threaded shank M 10x1 - **Content 150 g**

Code <i>K 3894 1040</i>	<b>K 3894/1</b>	Each €	 1
-------------------------	-----------------	--------	---

**Grease Guns**

**Body in high-quality steel**

**Version with double attachment for straight and gun-type use****With automatic grease advancement**

Light for use with loose grease and **it can be used with one hand**

Handle in die-cast aluminium


With rigid tube and head with gripping pincers for «Hydraulic» greasers

**Content of loose grease approx. 120 g**

Advancement pressure 200 bar - Threaded coupling M 10x1

Body Ø 37 mm - Overall length 260 mm - Weight 0,7 kg

Code <i>K 3894 3000</i>	<b>K 3894/3</b>	Each €	 1
-------------------------	-----------------	--------	---

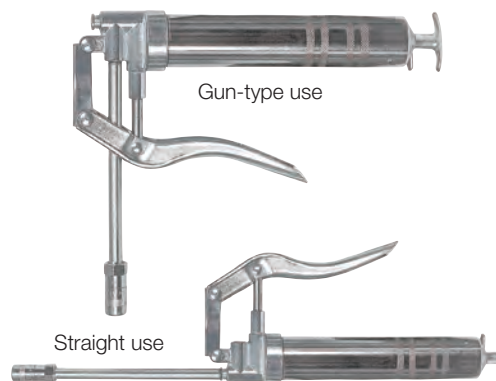**Heavy version with automatic grease advancement**

Flexible hose length 400 mm and head with gripping pincers for «Hydraulic» greasers

Usable with grease cartridge or loose grease

**Content 500 g** - Threaded coupling M 10x1 - Body Ø 60 mm

Overall length 400 mm

Code <i>K 3895 0500</i>	<b>K 3895</b>	Each €	 1
-------------------------	---------------	--------	---

**Economical version with automatic grease advancement**


Flexible hose length 400 mm and head with gripping pincers for «Hydraulic» greasers

Threaded coupling M 10x1

Content	g	300	500*	750	1000**
Code		<i>K 3896 0300</i>	<i>K 3896 0500</i>	<i>K 3896 0750</i>	<i>K 3896 1001</i>
<b>K 3896</b>	Each €				
Body	Ø mm	45	56	56	<b>57</b>
Total length	mm	300	400	450	450
Usable		loose grease	Grease cartridge or loose grease	loose grease	grease cartridge or loose grease

\* With hose length 300 mm

\*\* Suitable for cartridges K 3898/4 of 600 g

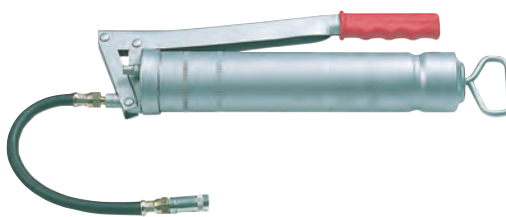

**Body in high-quality galvanized steel** with non-slip knurlings

**Version for high performance** - Conforming to DIN 1283 - TÜV-GS

Automatic grease advancement in cartridge and loose



Offset lever to prevent operators' fingers being pinched and with graduation to measure the necessary grease quantity

Content **500 g** - Advancement pressure 400 bar, guaranteed - Threaded coupling M 10x1

Body Ø 56 mm - Overall length 350 mm

**K 3897/1 - Without hose**

**K 3897/2 - With flexible safety hose** length 350 mm (bursting pressure up to 1000 bar) conforming to DIN 1283 and head with gripping pincers for «Hydraulic» greasers

Code <i>K 3897 1000</i>	<b>K 3897/1</b>	Each €	 1
Code <i>K 3897 2000</i>	<b>K 3897/2</b>	Each €	 1



K 3897/2 = K 3897/1 + flexible hose