


D shackles

L 2234 - In forged steel, marked with capacity - Galvanized finishing - With **CE** marking

L 2236 - In stainless steel AISI 316 - INOX - With **CE** marking

Pin diameter	mm	5*	6*	8	10	11	12	14	16	20	22	25
Code	L 2234	0005	0006	0008	0010	0011	0012	0014	0016	0020	0022	0025
L 2234	Each €											
Code	L 2236	0005	0006	0008	0010	—	0012	0014	0016	0020	0022	0025
L 2236- INOX	Each €											
Pin diameter D	inches	3/16	1/4	5/16	3/8	7/16	1/2	9/16	5/8	3/4	7/8	1
Internal opening	mm	10	12••	12	16	18	20	22	24	28	32	36
Mounting bracket E	mm	6	8	6	8	10	10	11	12	16	21	22
Mounting bracket E	inches	1/4	5/16	1/4	5/16	3/8	3/8	7/16	1/2	5/8	13/16	7/8
Capacity	kg	60 •	100••	250	400	500	630	800	1000	1600	2000	2500


* Non marked **CE** - • L 2234 capacity 100 kg - •• L 2234 13 mm internal opening and capacity up to 160 kg

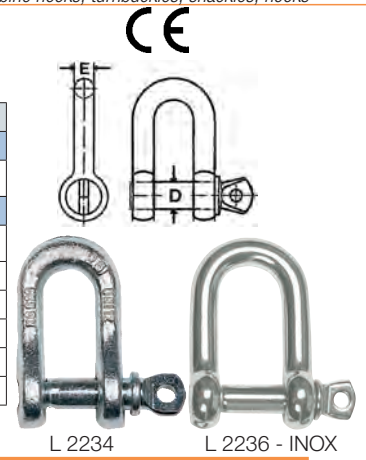

OMEGA shackles

In steel - Galvanized finishing - With **CE** marking

Pin diameter	mm	6	8	10	11	13	16	20	22	25	28	32	35	38
Code	L 2236	5006	5008	5010	5011	5013	5016	5019	5022	5025	5028	5032	5035	5038
L 2236/5	Each €													
Pin diameter D	inches	1/4	5/16	3/8	7/16	1/2	5/8	3/4	7/8	1	1 1/8	1 1/4	1 3/8	1 1/2
Internal opening	mm	16	20	21	26	29	33	43	51	58	68	74	82	90
Mounting bracket E	mm	5	6,4	8	9,6	11,1	12,7	15,8	19	22,2	25	28	32	36
Mounting bracket E	inches	3/16	1/4	5/16	3/8	7/16	1/2	5/8	3/4	7/8	1	1 1/8	1 1/4	1 1/2
Capacity	kg	500	750	1000	1500	2000	3250	4750	6500	8500	9500	12000	13500	17000

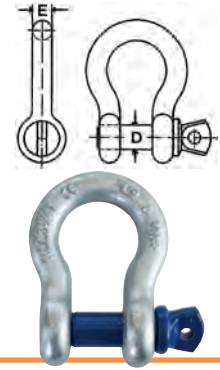

ABC TOOLS Lifting hooks

Marked with capacity

With safety gate and quick snap opening and closing

The capacity is expressed in tons according to Italian Presidential Decree nr. 459/96


Type with eye

High-resistant carbon steel execution, painted

Capacity	t	0,8	1	1,6	2	3,2	5	7,5
Code	L 2238	0008	0001	0016	0002	0032	0005	0075
L 2238	Each €							
Length "A"	mm	109	126	144	163	201	256	317
Diameter "B"	mm	19	23	28	32	38,5	51	63
Dimension "C"	mm	24	26	28	30	33	40	51
Weight	kg	0,3	0,4	0,6	0,9	1,9	3,7	6,8

Grade 80 high-resistant alloy steel execution, painted

Capacity	t	1,12	2	3,15	5,3	8	12,5
Code	L 2238	2112	2002	2315	2053	2008	2125
L 2238/2	Each €						
Length "A"	mm	110	140,5	162	201	256	317
Diameter "B"	mm	15	28	30	39	51	63
Dimension "C"	mm	22	25	27,5	33	40	51
Weight	kg	0,3	0,6	0,9	1,9	3,7	6,8

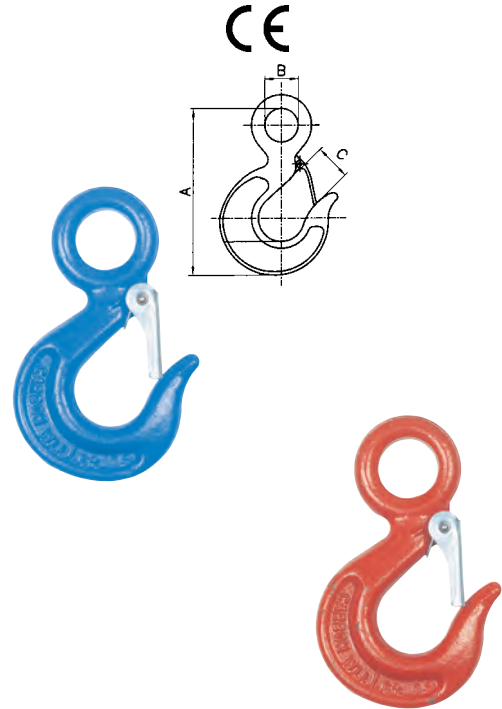

Type with swivel hook

High-resistant carbon steel execution, painted

Capacity	t	0,8	1	1,6	2	3,2	5	7,5
Code	L 2239	0008	0001	0016	0002	0032	0005	0075
L 2239	Each €							
Length "A"	mm	136	164	198	213	246	313	364
Dimension "DxE"	mm	32x22,5	38x34	44,5x39	44,5x39	48x39	64x53	70x53
Dimension "C"	mm	17	28	30	30	32,5	43	49,5
Weight	kg	0,7	0,8	1,2	1,4	2,2	4,6	7,4

Grade 80 high-resistant alloy steel execution, painted

Capacity	t	1,12	2	3,15	5,3	8	12,5
Code	L 2239	2112	2002	2315	2053	2008	2125
L 2239/2	Each €						
Length "A"	mm	140	192	208,5	246	313	363,5
Diameter "DxE"	mm	32x26	44x39	44x39	50x44	64x60	70x64
Dimension "C"	mm	22	22	26	35	43	49,5
Weight	kg	0,3	1	1,2	2,2	4,6	7,4

