



Lifting slings

Suitable for lifting and then moving materials conforming to EN 1492-1
Factor of safety 7:1


Double-layer flat sling in polyester

Reinforced eye with anti-wearing and anti-abrasion synthetic material
The sling colours identify the load capacity conforming to European standards

- L 3552/2 - Sling length 2 m
- L 3552/3 - Sling length 3 m
- L 3552/4 - Sling length 4 m
- L 3552/6 - Sling length 6 m
- L 3552/8 - Sling length 8 m

For max. load	t	1	2	3	5
Code		L 3552 2001	L 3552 2002	L 3552 2003	—
L 3552/2 - 2 m	Each €				
Code		L 3552 3001	L 3552 3002	L 3552 3003	L 3552 3005
L 3552/3 - 3 m	Each €				
Code		L 3552 4001	L 3552 4002	L 3552 4003	L 3552 4005
L 3552/4 - 4 m	Each €				
Code		L 3552 6001	L 3552 6002	L 3552 6003	L 3552 6005
L 3552/6 - 6 m	Each €				
Code		—	—	—	L 3552 8005
L 3552/8 - 8 m	Each €				
Slot size	mm	350x50	350x60	400x90	400x150
Strap width	mm	30	60	90	150

Type of lifting	Straigth	Choke hitch	"U" shaped	At angle from	
				7° to 45°	45° to 60°
<i>Modal factor</i>	1	0,8	2	1,4	1
<i>Sling width mm</i>	Load capacity t				
30	1	0,8	2	1,4	1
60	2	1,8	4	2,8	2
90	3	2,4	6	4,2	3
150	5	4,0	10	7,0	5

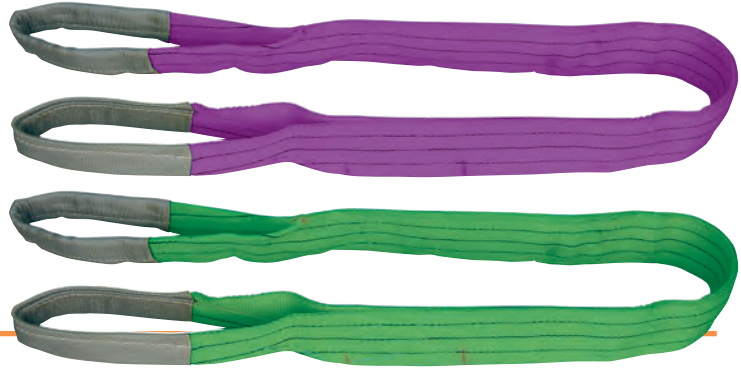

Tubular slings


Suitable for lifting and then moving materials conforming to EN 1492-2
Factor of safety 7:1

Double-layer sling in polyester

Reinforced eye with anti-wearing and anti-abrasion synthetic material
The sling colours identify the load capacity conforming to European standards

- L 3554/2 - Sling length 2 m
- L 3554/3 - Sling length 3 m
- L 3554/4 - Sling length 4 m
- L 3554/6 - Sling length 6 m
- L 3554/8 - Sling length 8 m

For max. load	t	1	2	3	5
Code		L 3554 2001	L 3554 2002	L 3554 2003	—
L 3554/2 - 2 m	Each €				
Code		L 3554 3001	L 3554 3002	L 3554 3003	L 3554 3005
L 3554/3 - 3 m	Each €				
Code		L 3554 4001	L 3554 4002	L 3554 4003	L 3554 4005
L 3554/4 - 4 m	Each €				
Code		L 3554 6001	L 3554 6002	L 3554 6003	L 3554 6005
L 3554/6 - 6 m	Each €				
Code		—	—	—	L 3554 8005
L 3554/8 - 8 m	Each €				

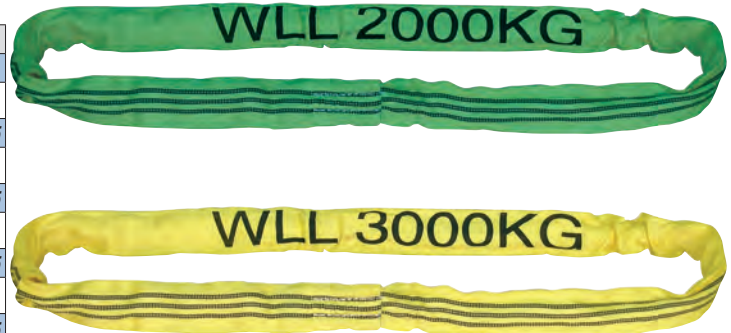

Abrasion protection for lifting and tubular slings


Type with anti-wear tubular coating in PVC sheath

Fast and easy to use: the sling or the harness needs to be inserted into the coating

It does not protect against sharp edges, metal sheets etc.

Length 1 m

Width	mm	50	60	100	150
Code		L 3558 1050	L 3558 1060	L 3558 1100	L 3558 1150
L 3558/1	Each €				
For slings L 3552 width	mm	30	60	90	150
For slings L 3554	t	1 - 2 - 3	5	—	—

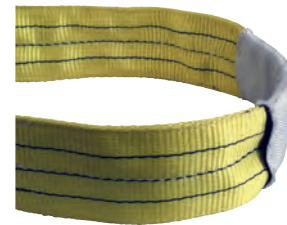

Cut proof, high-resistant type in polyurethane, thickness 5 mm

Internal layer in textile sheath suitable for inserting slings L 3552/2-L 3552/8
Resistant against cuts caused by sharp edges, metal sheets and coils.

High adherence to surfaces prevent loads

Length 1 m

Width	mm	60	90	150
Code		L 3558 4060	L 3558 4090	L 3558 4150
L 3558/4	Each €			
For slings L 3552 width	mm	30 - 60	90	150

