

ABC TOOLS Shock-absorbing lanyards

EN 355

Polyamide fibre absorber strap, double layer fabric

Polyamide fibre fall prevention rope Ø 10,5 mm

CE

Type without connectors


For combining with carabiner M 3467/8 opening 18 mm

Maximum extension: - fall factor 1 = 30 cm - fall factor 2 = 100 cm

Code M 3467 2000

M 3467/2

Each €



Type with 1 connector for hooking up to structures

Maximum extension: fall factor 1 = 30 cm - fall factor 2 = 100 cm

For combined use with harnesses M 3464/3 and M 3464/4

Connector in hard aluminium with double-lever lock - Opening 55 mm

Carabiner in galvanized steel with lock nut

Clear passage Ø 18 mm

Code M 3467 4000

M 3467/4

Each €



Dual arm type

Maximum extension: fall factor 1 = 40 cm - fall factor 2 = 110 cm

Suitable for anchoring to and climbing structures without anchoring devices,

for working on scaffolding and in the building sector in general

For combining with harnesses M 3464/3 and M 3464/4

Connector in hard aluminium with double lever locking - Opening 55 mm


Carabiner in galvanized steel with locking nut

Clear passage 18 mm Ø

Code M 3467 6000

M 3467/6

Each €

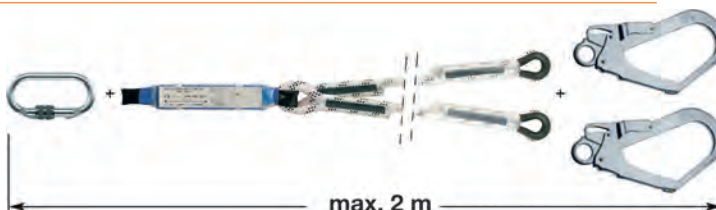

Safety carabiners - EN 362

Sz. 18 - With threaded locking nut - In galvanized steel

Sz. 55 - With locking device - In hard aluminium

Suitable for anchors on scaffolding

Clear passage	mm	18	55
Code		M 3467 8001	M 3467 8002
M 3467/8	Each €		
Breaking load	kN	25	20
Overall length	mm	105	235



Sz. 18



Sz. 55

ABC TOOLS Fall prevention kit

Tool kit made up of:

1 positioning belt M 3464/1 - EN 358

1 harness with 1 back connector M 3464/3 - EN 361

1 positioning cord M 3466/2 with 2 carabiners

Provided in a practical case with Velcro closing

Code M 3467 9800

M 3467/98

Each €



M 3466/2

M 3466/2

M 3466/2

M 3466/2

M 3466/2

M 3466/2

M 3466/2

M 3466/2

M 3466/2

M 3466/2

M 3466/2

M 3466/2

M 3466/2

M 3466/2

M 3466/2

M 3466/2

M 3466/2

M 3466/2

M 3466/2

M 3466/2

M 3466/2

M 3466/2

M 3466/2

M 3466/2

M 3466/2

M 3466/2

M 3466/2

M 3466/2

M 3466/2

M 3466/2

M 3466/2

M 3466/2

M 3466/2

CE



Elastic tether cords for tying down tools

To withhold tools and protect against the risk of injury and material damage caused by falling

Suitable for use in construction, roofing, climbing workers, trade fair installation workers, climbers, rock climbers

Flexible anchoring cable to work comfortably and safely

Outside in embossed fabric band, inside in high-resistance extendible nylon band

NOT certified to secure people

ABC TOOLS

Easy to use: feed the end ribbon through the safety loop in the tool and tighten making it pass through the two steel rings

Max. load 3 kg (tool weight) - **Elongation under load up to about 1,2 m**

M 3465/5 - Fabric loop end, for use with steep carabiner (see grp. L 0)

M 3465/7 - End with carabiner with spring lever

Code M 3465 5000

M 3465/5


Each €



Code M 3465 7000

M 3465/7

Each €

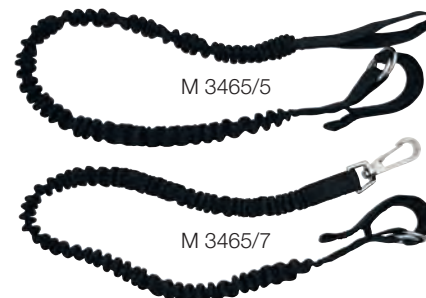

M 3465/5

M 3465/7

KNIPLEX

With loop in flat strip fastened to one side and cord sewn with cord stopper on the other

Easy to use: insert the cord stopper in the tool's safety loop, thread the entire cord through, pull and lock in place with the cord stops

Also suitable for use with KNIPLEX screw drivers tested to VDE standards, using their through-hole

Maximum load 1,5 Kg (tool weight) - **Elongation under load up to about 1,5 m**

Code M 3465 9000

M 3465/9

Each €



Suitable for KNIPLEX VDE screwdrivers

