

ABC TOOLS Welding shields

According to EN 175 standard - Complete with hand grip
Suitable for glass panels 75x98 mm (not included, see M 3822/1 ÷ M 3822/8)

Type made of unbreakable plastic

Light-weight execution - Dimensions 400x250 mm - Depth 105 mm

Code M 3820 0000	M 3820/0	Each €		1
------------------	-----------------	--------	---	---

Fibre type

M 3820/1 - Straight execution - Dimensions 375x280 mm - Depth 90 mm

M 3820/2 - Inclined execution - Dimensions 385x270 mm - Depth 90 mm

Code M 3820 1000	M 3820/1	Each €		1
------------------	-----------------	--------	---	---

Code M 3820 2000	M 3820/2	Each €		1
------------------	-----------------	--------	---	---



ABC TOOLS Helmet masks for welders

Fibre type

Support helmet adjustable using a rack knob

For glass panels, size 75x98 mm - Dimensions 300x240 mm - Depth 145 mm - Without glass panels

Code M 3820 3000	M 3820/3	Each €		1
------------------	-----------------	--------	---	---

Plastic type

With support helmet adjustable using a rack knob

Suitable for glass panels, size 75x98 mm

Allows complete protection of the face, and partial protection of the neck and head

Dimensions: 335x245 mm - Depth 185 mm - Weight 320 g - Without glass panels

Code M 3820 4000	M 3820/4	Each €		1
------------------	-----------------	--------	---	---



Type with automatic darkening LCD filter and solar cell power - EN 175 - EN 379

In plastic, with adjustable support helmet - Operating temperature -10 °C - +65 °C

M 3820/45 - For electrode, Mig, Mag, Tig welding >20A and "grinding"

option for cutting and deburring - Protection level DIN 16 against UV/IR rays

With protection level adjustable from DIN 9 to DIN 13 - Clarity grade DIN 4

Light/dark reaction time 0,3 ms - Light/dark delay 0,1-1 s

Filter dimensions 110x90x8 mm - Viewing area 100x60 mm - Weight 500 g

M 3820/5 - For electrode, plasma, Mig/Mag, Pulsated Mig, Tig, Pulsated Tig welding

Protection level DIN 15 against UV/IR rays

With adjustable protection grade from DIN 5 to DIN 13 - Clarity grade DIN 4

Light/dark Reaction time 0,08 ms - Light/dark delay 0,1-0,9 s

Filter dimensions 110x90x8 mm - Viewing area 97x47 mm - Weight 510 g

Code M 3820 4500	M 3820/45	Each €		1
------------------	------------------	--------	---	---

Code M 3820 5000	M 3820/5	Each €		1
------------------	-----------------	--------	---	---



ABC TOOLS Protective visor

Transparent polycarbonate shield - EN 166

With support helmet, adjustable with rack knob

Excellent facial protection - Can be worn over normal corrective eyewear

Dimensions 475x320 mm - Depth 180 mm - Weight 435 g


Code M 3820 6000	M 3820/6	Each €		1
------------------	-----------------	--------	---	---




Glass panels for welding shields and masks


Suitable for welding masks M 3820/0 ÷ M 3820/4


Mirror type for Argon and CO₂ welding - EN 166 - EN 169 - Dimensions 75x98 mm

Graduation A1 DIN	10	11	12	13
Code	M 3822 1000	M 3822 2000	M 3822 3000	M 3822 4000
M 3822	Each €			
	pcs.	100	100	100

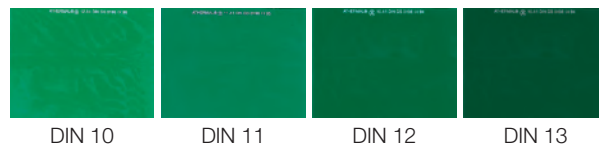

Adiactic type - EN 166 - EN 169 - Dimensions 75x98 mm

Graduation A1 DIN	10	11	12	13
Code	M 3822 4400	M 3822 5500	M 3822 6600	M 3822 7700
M 3822	Each €			
	pcs.	100	100	100

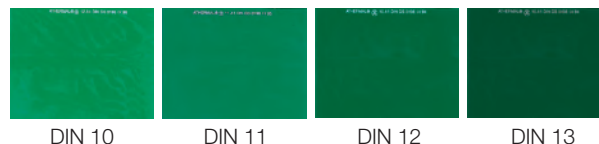

Colourless type (protection for coloured glass panels) - EN 166 - In pack of 50 pieces

Code M 3822 8000	M 3822/8	The pack €		1
------------------	-----------------	------------	---	---

