


Tightening pliers

In very strong, fibre glass reinforced, synthetic resin

Fully insulated to avoid short-circuits

Suitable for fixing covers

With spring inside  - Max opening 15 mm

Overall length 150 mm

Code M 7128 0000	M 7128	Each €		6
-------------------------	---------------	--------	---	---



 1000 V VDE 0680/1

Synthetic resin snipe nose pliers

In very strong, fibre glass reinforced, synthetic resin


Fully insulated to avoid short-circuits

Hand grips in soft, synthetic resin

Type with half-round long jaws, knurled - 

Overall length 220 mm

Code M 7129 2000	M 7129/2	Each €		1
-------------------------	-----------------	--------	---	---

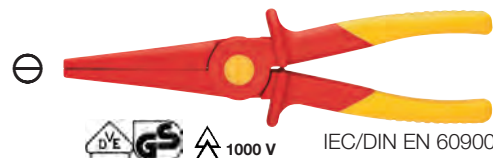


   IEC/DIN EN 60900

Combination type with flat jaws, knurled - 

Suitable for assembling and sealing meters

Overall length 180 mm

Code M 7129 4000	M 7129/4	Each €		1
-------------------------	-----------------	--------	---	---

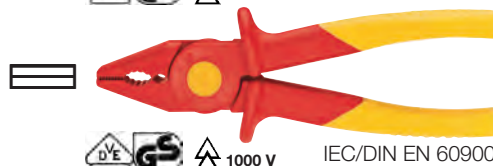

   IEC/DIN EN 60900

Combination pliers with pointed jaws

In special forged, oil-hardened steel

With a **tapered head and pointed jaws** (with great resistance for torsion) they are ideal for work in confined spaces

Knurled blades to grasp and extract small details such as nails, pins and bolts

Reinforced joint with high transmission ratio to facilitate cutting

Thick two-component handles - Chromed head

Medium-resistance wire cutter \varnothing 3,0 mm and high resistance \varnothing 2,0 mm - Overall length 145 mm

Code M 7129 9145	M 7129/9	Each €		1
-------------------------	-----------------	--------	---	---



   IEC/DIN EN 60900

Combination pliers



In chrome-vanadium steel

Two-component, very thick handles with hand guard - Chromed head

Wire cutting: medium strength 3,4 mm \varnothing - high strength 2,2 mm \varnothing

Overall length	mm	160	180	200
Code		M 7129 8160	M 7129 8180	M 7129 8200
M 7129/8	Each €			



   IEC/DIN EN 60900






In special steel - DIN ISO 5746

Cutting edges further induction tempered - Hardness approx 60 HRc

Very thick, two-component handles with hand guard - Flat, chromed head - 6

Overall length	mm	160	180	200
Code		M 7130 0160	M 7130 0180	M 7130 0200
M 7130/0	Each €			
Cuts medium strength wire \varnothing	mm	3,1	3,4	3,8
Cuts high strength wire \varnothing	mm	2,0	2,2	2,5



   IEC/DIN EN 60900

In highly hardened, oil tempered, special steel - DIN ISO 5746

Cutting edge hardness approx HRc 63, extended, for cutting larger diameter cables, tempered and hardened in an oil bath, also suitable for cutting **piano wire**

With large leverage ratio - For continuous use at maximum performance

Eccentric movement to develop 50% higher cutting forces, compared to traditional types

M 7130/1 - Very thick, two-component handles with hand guards - Flat, chromed head - 6

M 7130/2 - Immersion insulated handles and hand guards - Flat, chromed head - 7

Overall length	mm	180	200	225
Code		M 7130 1180	M 7130 1200	M 7130 1225
M 7130/1	Each €			
Code		—	M 7130 2200	M 7130 2225
M 7130/2	Each €			
Cuts medium resistance wire \varnothing	mm	2,5	2,8	3,0
Cuts piano wire \varnothing	mm	2,0	2,2	2,5



   IEC/DIN EN 60900



M 7130/2

«Forte» model