



In hardened steel, class 10,9 - Turned  
Burnished and phosphate-coated finish

In indivisible packaging

Flat type - DIN 6340

For nuts	M	6	8	10	12	14	16	18	20	22	24	27	30
Code	G 3752 ...	0006	0008	0010	0012	0014	0016	0018	0020	0022	0024	0027	0030
<b>G 3752/0</b>	Each €												
Hole diameter D	mm	6,6	8,4	10,5	13	15	17	19	21	23	25	28	31
External diameter d <sub>e</sub>	mm	17	23	28	35	40	45	45	50	50	60	68	68
Thickness h	mm	3,5	4	4	5	5	6	6	6	8	8	10	10
	pcs.	10	10	10	10	10	10	10	10	10	1	1	1



Convex type - DIN 6319 C

For nuts	M	6	8	10	12	14	16	20	24
Code	G 3752 ...	2006	2008	2010	2012	2014	2016	2020	2024
<b>G 3752/2</b>	Each €								
Hole diameter D	mm	6,4	8,4	10,5	13	15	17	21	25
External diameter d <sub>e</sub>	mm	12	17	21	24	28	30	36	44
Thickness h	mm	2,3	3,2	4	4,6	5	5,3	6,3	8,2
Radius		9	12	15	17	22	22	27	32
	pcs.	10	10	10	10	10	10	10	10



Concave type - 120°

DIN 6319 D

For nuts	M	6	8	10	12	14	16	20	24
Code	G 3752 ...	4006	4008	4010	4012	4014	4016	4020	4024
<b>G 3752/4</b>	Each €								
Hole diameter D	mm	7,1	9,6	12	14,2	16,5	19	23,2	28
External diameter d <sub>e</sub>	mm	12	17	21	24	28	30	36	44
Thickness h	mm	2,8	3,5	4,2	5	5,6	6,2	7,5	9,5
	pcs.	10	10	10	10	10	10	10	10



DIN 6319 G - With increased diameter and thickness

For nuts	M	6	8	10	12	14	16	20	24
Code	G 3752 ...	6006	6008	6010	6012	6014	6016	6020	6024
<b>G 3752/6</b>	Each €								
Hole diameter D	mm	7,1	9,6	12	14,2	16,5	19	23,2	28
External diameter d <sub>e</sub>	mm	17	23	28	35	40	45	50	60
Thickness h	mm	4	4	5	5	5	6	8	10
	pcs.	10	10	10	10	10	10	10	1



G 5

**ABC TOOLS Assortment for clamping**


In hardened steel

Assortments composed of 66 elements most frequently used for quick tightening and for clamping:

- straight clamps, stepped clamps, stepped supports, threaded studs, hammer-head screws, T-nuts, hexagonal nuts, joining sleeves and flat washers

Supplied in a box

For "a" slot	mm	12		14		16		18	
Code		G 3753 0012		G 3753 0014		G 3753 0016		G 3753 0018	
<b>G 3753</b>	Each €								
Consisting of	Pcs	Size	Pcs	Size	Pcs	Size	Pcs	Size	
Straight clamps G 3748/1	4	012	4	014	4	016	4	016	
Stepped clamps G 3748/7	4	012	4	012	4	016	4	016	
Stepped supp. G 3749/2	2	31	2	31	2	31	2	31	
	4	64	4	64	4	64	4	64	
Studs G 3751/2	2	10x80	2	12x80	2	14x100	2	16x125	
	2	10x100	2	12x160	2	14x160	2	16x160	
Hammer-head screw G 3751/3	2	12x80	2	14x100	4	16x100	4	18x150	
	4	12x125	4	14x150	2	16x150	2	18x200	
Nuts for T-slots G 3751/4	4	10	4	12	4	14	4	16	
Hexagonal nuts G 3751/7	12	12	12	14	12	16	12	18	
Lower hexagonal nuts M	4	10	4	12	4	14	4	16	
Extension nuts G 3751/9	4	10	4	12	4	14	4	16	
Normal washers hole D mm	4	10,5	4	13	4	15	4	17	
	12	13	12	15	12	17	12	19	
Box LxPxh	mm	370x320x40		370x320x40		470x330x50		470x330x50	
Weight	kg	10,5		12		17		18	

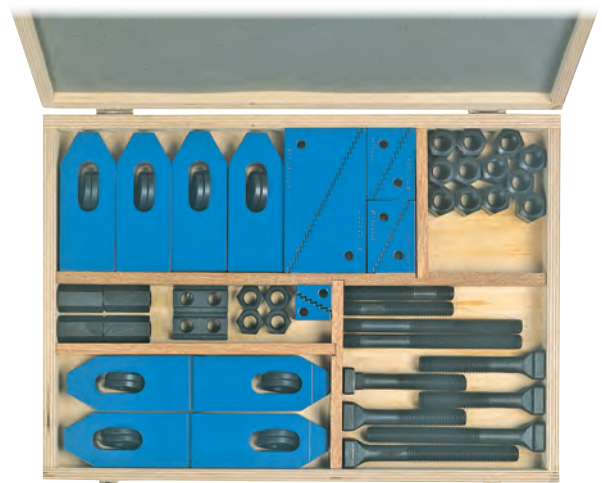

G 3753 size 16