

Tapping chucks with torque limiter

For precision tapping - With axial compensation

With adjustable clutch for torque control and, depending on the diameter of the thread, to prevent breaking the tap

With interchangeable coupling cone

Supplied with service wrenches

ABC TOOLS

With rotation direction inversion

Suitable for single-direction machines not equipped with chuck rotation inversion

Automatic return ratio 1,75:1

With contrast rod

For tapping	M	2÷7	5÷12	8÷20
Code		G 8100 0007	G 8100 0012	G 8100 0020
G 8100	Each €			
Coupling		J 33	M 16 x 2	M 20 x 2,5
With collets for		CM2 - CM3	CM3 - CM4	CM3 - CM4
Max. rev. n°		1500	1000	600
Length L1	mm	130	156	204
With collets for	M	2÷3 and 4÷7	5÷8 and 10÷12	8÷14 and 16÷20
Weight	kg	1,5	2,7	5,2




G 8 → pag. 609

ABC TOOLS Chucks for end mills

Suitable for end mills with WELDON type slot

Type with ISO 40 attachment

For mills d	Ø mm	6	8	10	12	16
Code		G 8470 0006	G 8470 0008	G 8470 0010	G 8470 0012	G 8470 0016
G 8470	Each €					
Diameter d	mm	25	28	35	42	48
Length L	mm	50	50	50	50	83
Thread G	M	16	16	16	16	16

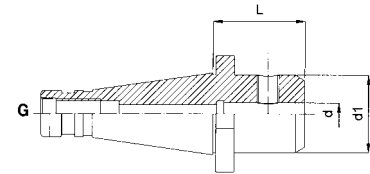


For mills d	Ø mm	6	8	10	12	16
Code		G 8471 0006	G 8471 0008	G 8471 0010	G 8471 0012	G 8471 0016
G 8471	Each €					
Diameter d	mm	25	28	35	42	48
Length L	mm	63	63	63	63	63
Thread G	M	24	24	24	24	24



With ISO/DIN 69871 attachment

For mills Ø d	mm	6	8	10	12	16
Code		G 8472 4006	G 8472 4008	G 8472 4010	G 8472 4012	G 8472 4016
G 8472/40	Each €					
Diameter d	mm	25	28	35	42	48
Dimension L	mm	60	60	65	65	70

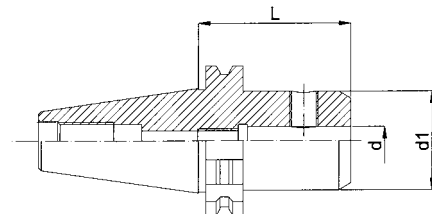

For mills Ø d	mm	6	8	10	12	16
Code		G 8472 5006	G 8472 5008	G 8472 5010	G 8472 5012	G 8472 5016
G 8472/50	Each €					
Diameter d	mm	25	28	35	42	48
Dimension L	mm	65	65	70	75	80



G 8 → pag. 613